

SENEBOGEN



451 kW (Stage V)



433 kW (Stage IIIa)

100 t



63.5 m



MAX CAB

6100E

Heavy Duty Cycle Crane

Stage V

6100E Advanced. The E-Series



1969: The first fully hydraulic duty cycle crawler crane worldwide, SK 15

What makes up the E-Series

- 65 years of experience in designing and constructing duty cycle cranes
- Uncompromisingly high performance in all areas
- Technology that can be mastered: High-quality components without over-engineering
- Long service life and high value retention

Your top benefits

1

Green Efficiency

Save fuel - reduce operating costs
Work quietly - protect operator and environment



2

Top-level performance

Durable mechanical systems - stressed parts optimized
High speeds - high load capacities

3

Maximum usability

Maxcab comfort cab - work in comfort
SENCON - work program selection made easy



4

Flexible operation

Drive under full load - small space requirements
Strong undercarriage traction - good off-road mobility

5

Easy to transport

Telescopic Starlifter undercarriage - quickly deployable
Ballast filling system - short set-up time

6



Maintenance and service made easy

SENNEBOGEN control system - easy diagnosis
Simple maintenance - clear labeling

7

Consultation and support in your area

3 production sites - 2 subsidiaries
150 sales partners - over 350 service stations

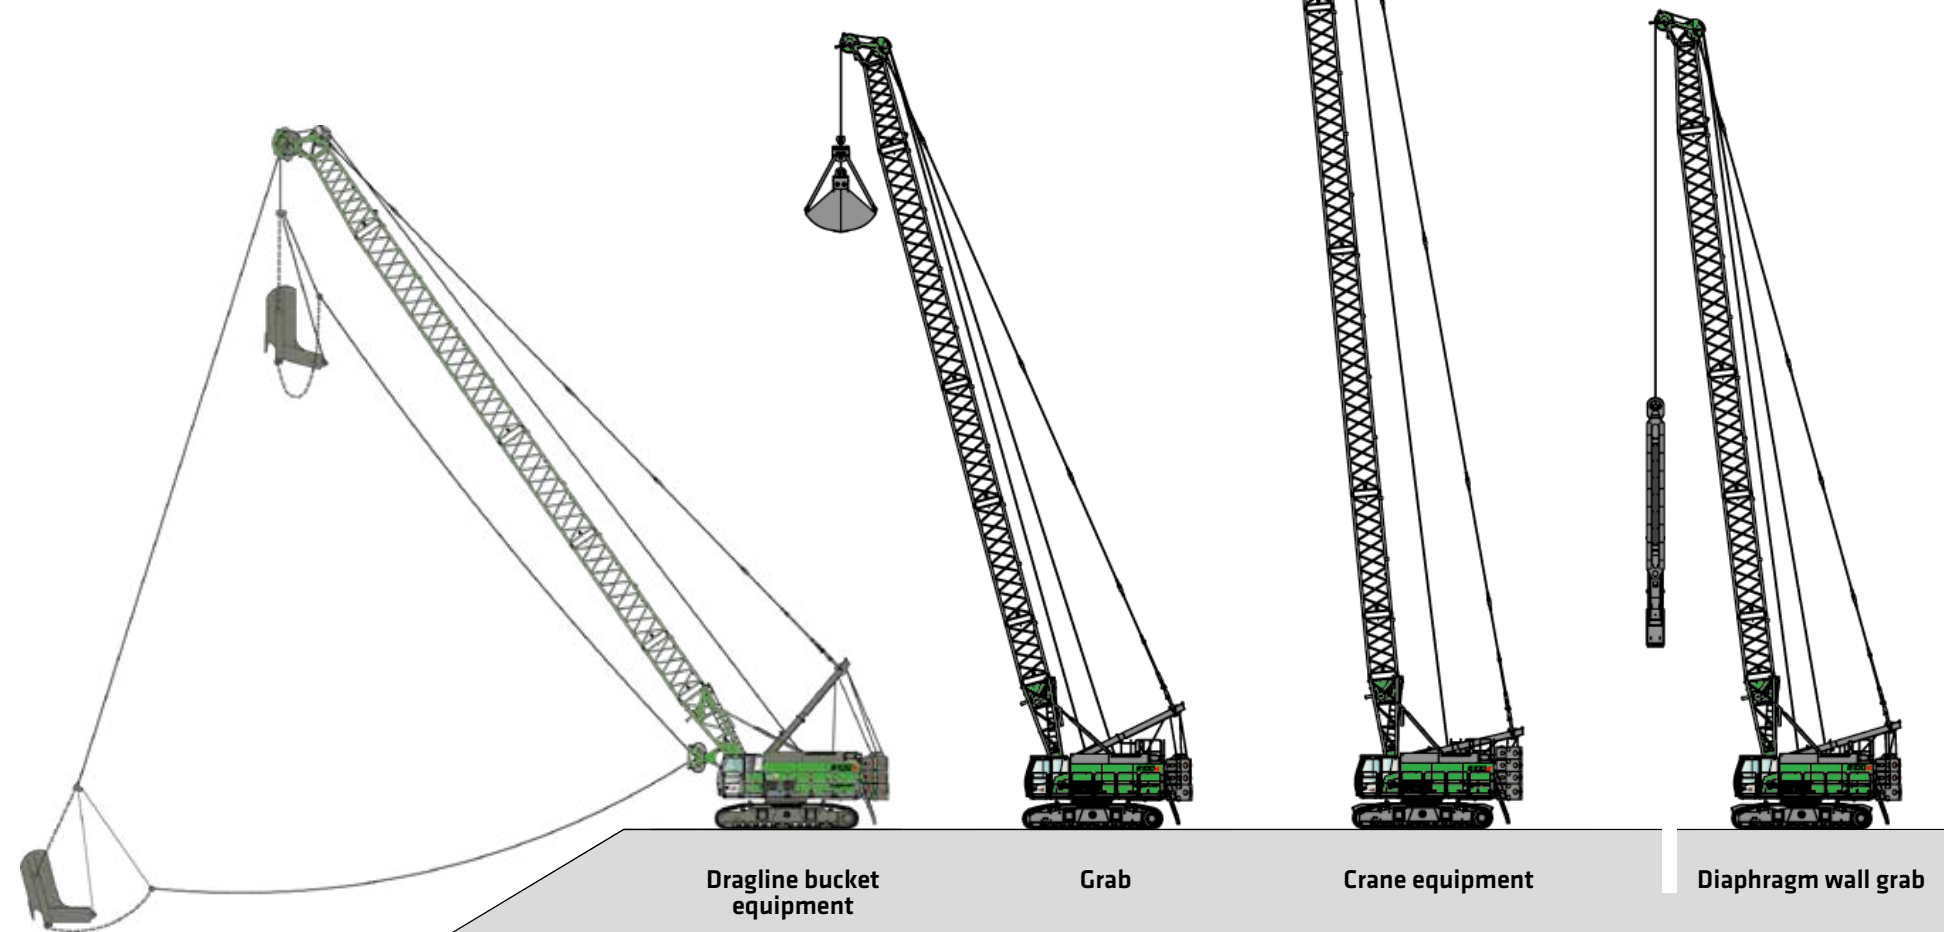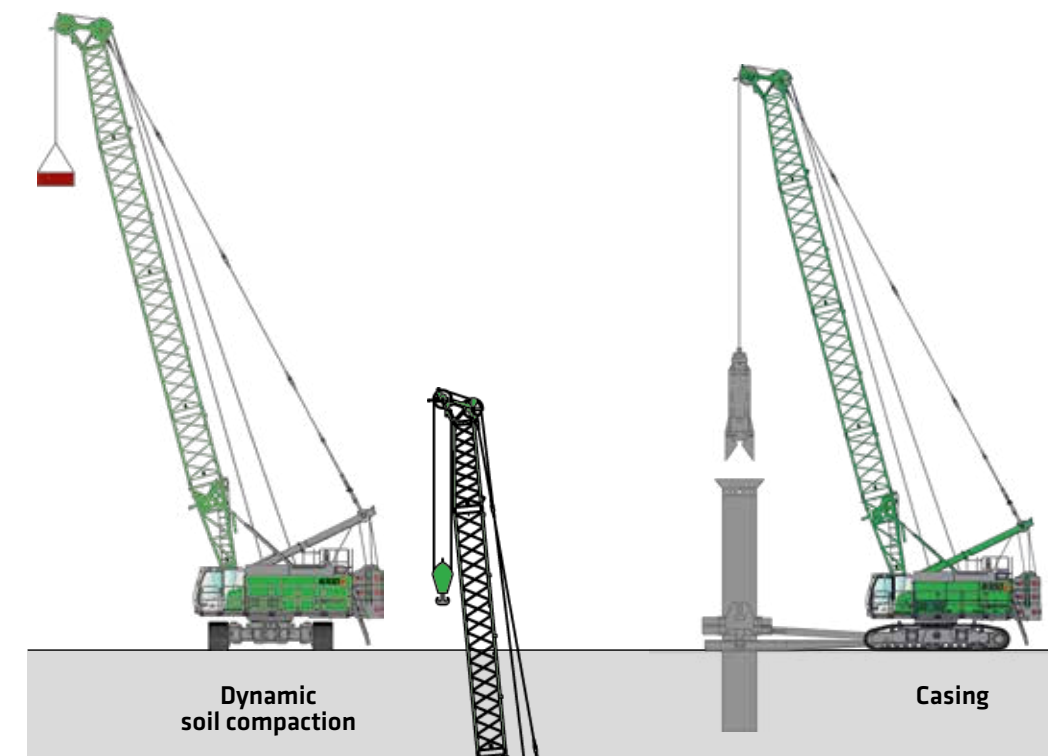

MACHINE TYPE	
Model (type)	6100
ENGINE	
Power	Stage V: Cummins X15 FR11805 Rated power: 451 kW at 1800 rpm Operating point standard: 451 kW at 1800 rpm Operating point ECO: 432 kW at 1650 rpm Tier 3: CAT C15 Rated power: 433 kW at 1800 rpm Operating point standard: 433 kW at 1800 rpm Operating point ECO: 423 kW at 1650 rpm Both: Direct injection, turbocharged, charge air cooling, reduced emissions, automatic idle/stop, diesel particle filter
Cooling	water-cooled
Air filter	Dry filter with pre-separator, automatic dust discharge, main element and safety element, contamination indicator
Fuel tank	800 l
Electr. system	24 V
Batteries	2 x 155 Ah, battery disconnect switch

UPPERCARRIAGE	
Design	Torsion-resistant box design, precision crafted, bronze bushings for boom mounting arrangement, clear and very service-friendly concept, engine installed in the longitudinal direction
Lighting	LED headlights for optimal lighting of the work area
Safety	Camera monitoring of the rear area and right side
Options	- Low-temperature package - Automatic pinion tooth lubrication - Automatic Internal central lubrication system for equipment and slewing ring - Sea climate resistant coating as corrosion protection - Gallery left and right on uppercarriage - Ballast support fixture

HYDRAULIC SYSTEM	
Multi-circuit hydraulic system for optimum functionality and performance, all movements can be operated simultaneously. The hydraulic pumps are variable displacement piston pumps with individual control and energy-saving flow-on-demand control. The pumps only pump as much oil as will actually be used.	

Pressure purging, load limit control	
Operating pressure	up to 330 bar
Filtration	High-performance filtration with long change interval, contamination indicator
Hydraulic tank	910 / 760 l (half-way up the sight glass)
Control system	Proportional, precision hydraulic servo control of the movements, 2 servo joysticks for work functions, additional functions via switches and foot pedals - arranged clearly and ergonomically
Options	- Bio-oil filling - SENNEBOGEN HydroClean micro-filter system (3µm) with water separator - Grab filling mechanism - Auxiliary hydraulics with 1 x 420 l/min

SLEWING DRIVE	
Gearbox	2 compact planetary gears with bent-axis hydraulic engine, integrated brake valves, positionable swing bearing brake
Parking brake	Spring-loaded multi-disk brake
Slewing ring	Three-row roller-bearing slewing ring with external gear teeth
Slewing speed	0-4 min ⁻¹ , 3 adjustable slewing speeds
Option	3 gearboxes

CAB	
Cab type	Maxcab rigid
Cab equipment	Sliding door, excellent ergonomics, climate automation, seat heater, air-suspension comfort seat, fresh air filter / circulating air filter, joystick steering, 12 V / 24 V USB connections, SENCON, skylight, sliding window in operator door
Options	- Hydraulically elevating cab type X220, can elevate up to 2.20 m - Cab can tilt by 20° - Auxiliary heating system with timer - In cab active carbon filter - Bullet proof windshield - Bullet proof skylight - Safety side window and rear window - Sunblind for windshield - Protective roof grating - FOPS protective roof grating - Protective front grating - Radio with USB and SD connections; MP3 and Bluetooth® functions - Electric cooling box

EQUIPMENT	
Design	Decade-long experience, most advanced computer simulation, the greatest degree of stability and longest service life
Boom adjustment winch	Bent-axis hydraulic engine drive with compact planetary gear, 110 kN tensile force; rope diameter 20 mm, adjustment speed 15° to 84.5° in approx. 55 sec.
Safety brake	Spring-loaded multi-disk brake
Boom	Boom length up to 63.5 m
Options	- Auxiliary boom for load capacities up to 24 t - Fixed fly up to 29.9 m - Load torque limiting system for hoist applications: Latest generation of load moment monitoring, display shows all important data, lifting limit switch, pressure relief valves, cable exit protection - Walkways on the boom across the entire boom width

UNDERCARRIAGE	
Design	Very strong wide-gauge undercarriage T107/420, stable welded construction
Drive	Strong travel drive with axial piston hydraulic engine and directly attached automatically functioning brake valve and compact planetary gear on each running gear side, protected drive gearing
Parking brake	Spring-loaded multi-disk brake
Traveling gear	Maintenance-free tractor chassis B7 with hydraulic chain tension, 800 mm triple grouser shoes
Speed	0 - 1.7 km/h
Options	900 mm triple grouser track shoes (transport width 3600 mm) 900 mm flat track shoes (transport width 3600 mm) - Hoisting device for dismounting the traveling gear - maintenance-free tractor chassis B8b - Pipework connections - Undercarriage ballast 2 x 8.5 t

WINCH			
The winches are driven via high-pressure-regulated adjustable hydraulic engines, thus there is always optimal pulling force speed control. Hydraulic lowering brake valves for sensitive, wear-free braking. Strong oil bath, planetary gear, low-maintenance.			
Crane brake and free-fall brake are spring-loaded, maintenance-free, low-wear disc brakes running in the oil bath, oil-cooled. The individual, variably adjustable free-fall brakes actively support the operator, prevent slack cable and protect the machine.			
	Standard	Option	Option
Winches	20 t	27.5 t	30 t
Cable pull (nominal load) 1st position	200 kN	275 kN	300 kN
Cable diameter	28 mm	34 mm	34 mm
Cable speed 2nd position	0-103 m/min	0-88 m/min	0-79 m/min
Cable capacity 1st position	44.9 m	42.7 m	47.3 m
Options	- Additional winch 110 kN - Grab steadying winch 30 / 18 / 9 kN - Cable tension pulley - Depth measuring device - Winch synchronization		

OPERATING WEIGHT	
Mass	approx. 91 t 6100 R with 2 x 27.5 t freefall winches, basic boom 10.3 m, counter weight 28 t, 60 t bottom block, 800 mm triple grouser track shoes, 100 m hoist cable
Note	Operating weight varies by model and equipment.




6100E Crane equipment



Main boom

Auxiliary boom
max. load capacity 24 t

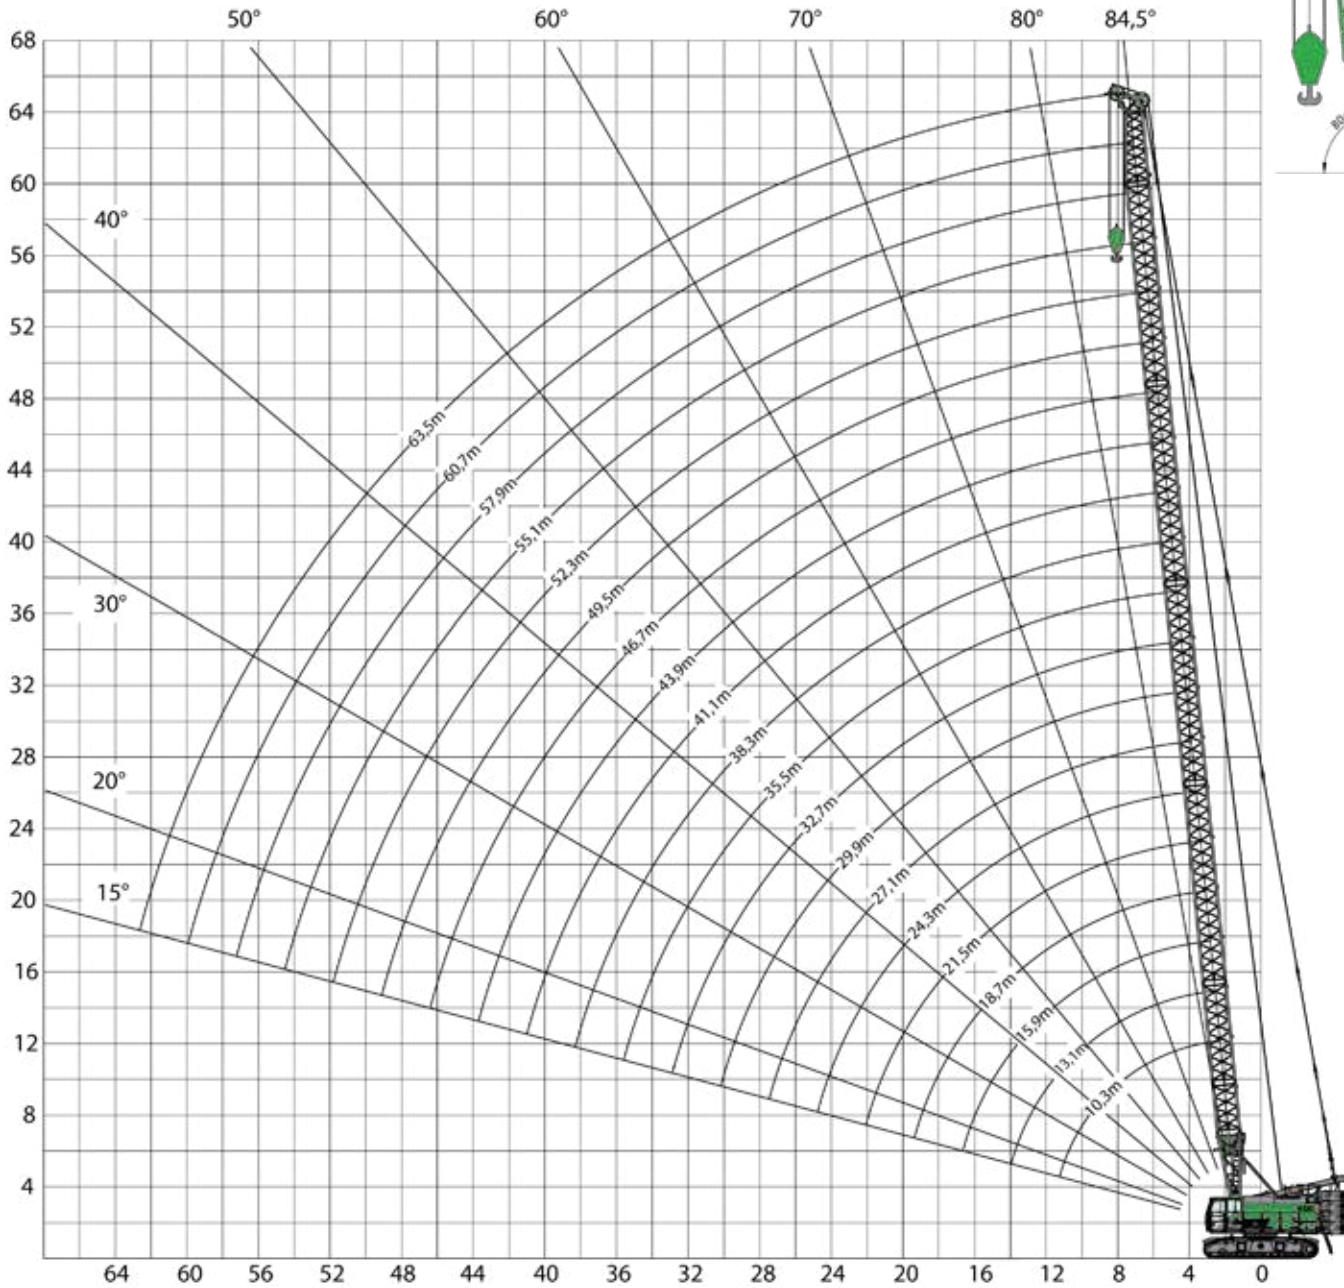

Boom configuration

	Boom length [m]																		
		10.3	13.1	15.9	18.7	21.5	24.3	27.1	29.9	32.7	35.5	38.3	41.1	43.9	46.7	49.5	52.3	55.1	57.9
Lower SH boom section type 1608-2	5.15 m	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
SH boom section type 1608-2	2.8 m	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
SH boom section type 1608-2	5.6 m	0	0	1	1	2	2	1	1	2	2	1	1	2	2	1	1	2	1
SH boom section type 1608-2	11.2 m	0	0	0	0	0	0	1	1	1	1	2	2	2	2	3	3	3	4
SH head piece type 1608-2	5.15 m	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Auxiliary boom S24.3 (optional)	24.0 t	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x

6100E Load capacity



Main boom



Boom radius [m]	Boom length [m]																	
	10.3	13.1	15.9	18.7	21.5	24.3	27.1	29.9	32.7	35.5	38.3	41.1	43.9	46.7	49.5	52.3	57.9	63.5
3.0	100.0	100.0/3.2	100.0/3.5	100.0/3.8														
4.0	100.0	100.0	100.0	100.0	100.0	92.1/4.3	82.6/4.6	73.5/4.8										
5.0	90.0	89.8	89.6	88.4	84.2	80.2	76.7	73.3	69.4/5.1	62.9/5.4	6.7/5.7	51.0/5.9						
6.0	75.0	74.6	74.2	71.0	68.1	65.4	63.0	60.7	58.5	56.3	54.5	50.9	45.8/6.2	40.7/6.5	36.4/6.7			
7.0	61.2	61.2	61.2	59.2	57.1	55.0	53.2	51.5	49.8	48.1	46.8	45.3	43.9	40.2	36.2	32.7	26.1/7.5	
8.0	50.2	50.2	50.2	50.0	49.0	47.4	45.9	44.6	43.2	41.9	40.8	39.6	38.4	37.3	35.5	32.0	25.7	20.5/8.1
9.0	42.4	42.4	42.4	42.2	42.1	41.5	40.3	39.2	38.1	36.9	36.1	35.1	34.1	33.1	32.4	31.2	25.0	19.8
10.0	36.6	36.6	36.6	36.4	36.3	36.1	35.8	31.4	33.9	32.9	32.2	31.3	30.5	29.6	29.1	28.3	24.3	19.1
11.0	32.1	32.1	32.1	31.9	31.8	31.6	31.5	27.9	30.5	29.6	29.1	28.3	27.5	26.7	26.3	25.6	23.5	18.4
12.0	30.4/11.4	28.6	28.5	28.4	28.2	28.0	27.9	24.9	27.7	26.9	26.4	25.7	25.0	24.3	23.9	22.3	22.0	17.6
13.0		25.6	25.6	25.4	25.3	25.1	25.0	22.5	24.8	24.5	24.1	23.5	22.8	22.2	21.9	21.3	20.1	16.9
14.0		23.2	23.2	23.0	22.9	22.7	22.6	20.4	22.3	22.1	22.1	21.5	21.0	20.4	20.1	19.5	18.5	16.1
15.0		22.9/14.1	21.1	21.0	20.8	20.6	20.5	18.7	20.3	20.1	20.1	19.9	19.3	18.8	18.5	18.0	17.0	15.4
16.0			19.4	19.2	19.1	18.9	18.8	17.2	18.5	18.3	18.3	18.1	17.9	17.4	17.1	16.7	15.7	14.6
17.0			18.1/16.8	17.7	17.6	17.4	17.3	15.8	17.0	16.8	16.8	16.6	16.4	16.1	15.9	15.4	14.6	13.7
18.0				16.4	16.3	16.0	15.9	14.7	15.7	15.4	15.5	15.3	15.1	14.9	14.8	14.4	13.5	12.7
19.0				15.3	15.1	14.9	14.8	13.6	14.5	14.3	14.3	14.1	13.9	13.7	13.7	13.4	12.6	11.8
20.0				14.7/19.5	14.1	13.9	13.8	11.9	13.5	13.2	13.2	13.0	12.9	12.7	12.7	12.5	11.7	11.0
22.0					12.4	12.1	12.0	10.5	11.7	11.5	11.5	11.3	11.1	10.9	10.9	10.7	10.2	9.5
24.0					12.2/22.2	10.7	10.6	9.3	10.3	10.1	10.0	9.8	9.6	9.4	9.5	9.3	8.9	8.3
26.0						10.2/25.0	9.5	8.3	9.1	8.9	8.8	8.6	8.4	8.2	8.3	8.1	7.7	7.2
28.0							8.7/27.6	7.5	8.1	7.9	7.8	7.6	7.4	7.2	7.2	7.1	6.7	6.3
30.0								7.4/30.4	7.3	7.0	7.0	6.8	6.6	6.4	6.4	6.2	5.8	5.4
32.0									6.6	6.3	6.3	6.0	5.8	5.6	5.6	5.4	5.0	4.7
34.0									6.2/33.1	5.7	5.6	5.4	5.2	5.0	5.0	4.8	4.4	4.0
36.0										5.3/35.8	5.1	4.8	4.6	4.4	4.4	4.2	3.8	3.4
38.0											4.6	4.4	4.1	3.9	3.9	3.7	3.3	2.9
40.0											4.5/38.5	3.9	3.7	3.5	3.4	3.2	2.8	2.5
42.0												3.7/41.2	3.3	3.1	3.0	2.8	2.4	2.0
44.0													3.0/43.9	2.7	2.7	2.5	2.1	1.7
46.0														2.5	2.3	2.1	1.7	1.3
48.0														2.4/46.6	2.1	1.8	1.4	1.0
50.0															1.9/49.3	1.6	1.2	
52.0																1.4		
54.0																		
Cable ø	Number of falls																	
	28 mm	8	8	8	8	8	7	6	6	5	5	5	4	4	3	3	3	2
34 mm	5	5	5	5	5	5	5	5	4	4	4	3	3	3	3	2	2	2

Notes:*

- 1. The load ratings given apply when the machine is on a firm and level surface.
- 2. The load ratings are given in tonnes and apply 360 degrees.
- 3. The load capacities are in observance of standards ISO 4305 Tab. 1+2 as well as the tilt angle method (4° tilt angle).
- 4. The weight of the load handling equipment (hooks, suspension gear) should be deducted from the load capacities.
- 5. The load ratings apply for the maximum undercarriage track width of 4200 mm.
- 6. Load capacities must be limited or reduced in adverse conditions such as soft or uneven ground, slopes, wind, side loads, swinging loads, jolts or sudden stopping of loads, personnel and operators not experienced in handling loads.
- 7. Permissible cable pull per strand in crane mode for cable diameter 28 mm - 14,000 kg / for cable diameter 34 mm - 20,000 kg
- 8. The load ratings apply to the SH boom (boom assembly as per operating instructions).
- 9. The load ratings apply for optimal boom assembly and pulley head with steel cable rollers.
- 10. The load ratings given are for reference only. Please refer to the operating instructions for the relevant applicable load ratings.

6100E Load capacity



Boom radius [m]	Boom length [m]																			
	10.3	13.1	15.9	18.7	21.5	24.3	27.1	29.9	32.7	35.5	38.3	41.1	43.9	46.7	49.5	52.3	55.1	57.9	60.7	
3.0	100.0	100.0/3.2	100.0/3.5	100.0/3.8																
4.0	100.0	100.0	100.0	100.0	96.8	85.0/4.3	75.7/4.6	68.1/4.8												
5.0	86.0	85.5	82.9	78.8	75.0	71.4	68.2	65.3	61.7/5.1	56.4/5.4	51.8/5.7	47.8/5.9								
6.0	69.2	69.0	66.0	63.2	60.6	58.2	56.0	53.9	51.9	49.9	48.3	46.6	44.2/6.2	40.7/6.5	36.4/6.7					
7.0	54.3	54.3	54.3	52.6	50.7	48.8	47.2	45.7	44.1	42.6	41.4	40.1	38.7	37.5	36.2	32.7	29.4/7.3	26.1/7.5	23.3/7.8	
8.0	44.5	44.5	44.4	44.3	43.4	42.0	40.7	39.5	38.2	37.0	36.1	34.9	33.9	32.8	32.1	31.1	28.8	25.7	23.2	
9.0	37.5	37.5	37.5	37.3	37.2	36.7	35.6	34.7	33.6	32.6	31.8	30.9	30.0	29.1	28.4	27.6	26.8	25.0	22.5	
10.0	32.3	32.3	32.3	32.2	32.0	31.8	31.6	30.8	29.9	29.0	28.4	27.5	26.7	26.0	25.5	24.7	24.0	23.3	21.9	
11.0	28.3	28.3	28.3	28.1	28.0	27.8	27.7	27.6	26.8	26.0	25.5	24.8	24.1	23.4	23.0	22.3	21.7	21.0	20.4	
12.0	26.8/11.4	25.1	25.1	25.0	24.8	24.6	24.5	24.5	24.3	23.6	23.1	22.5	21.8	21.2	20.8	20.2	19.7	19.1	18.5	
13.0		22.5	22.5	22.4	22.2	22.0	21.9	21.8	21.7	21.5	21.1	20.5	19.9	19.3	19.0	18.4	17.9	17.4	16.9	
14.0		20.4	20.3	20.2	20.0	19.8	19.7	19.7	19.5	19.3	19.3	18.7	18.2	17.7	17.4	16.9	16.4	15.9	15.4	
15.0		20.0/14.1	18.5	18.4	18.2	18.0	17.9	17.8	17.6	17.4	17.5	17.2	16.7	16.2	16.0	15.5	15.1	14.6	14.2	
16.0			17.0	16.8	16.7	16.5	16.4	16.3	16.1	15.9	15.9	15.7	15.4	15.0	14.8	14.3	13.9	13.4	13.0	
17.0			15.8/16.8	15.5	15.3	15.1	15.0	14.9	14.7	14.5	14.5	14.3	14.2	13.8	13.7	13.2	12.8	12.4	12.0	
18.0				14.3	14.1	13.9	13.8	13.7	13.5	13.3	13.3	13.1	13.0	12.8	12.7	12.3	11.9	11.4	11.1	
19.0				13.3	13.1	12.9	12.8	12.7	12.5	12.3	12.3	12.1	11.9	11.7	11.8	11.4	11.0	10.6	10.2	
20.0				12.8/19.5	12.2	12.0	11.9	11.8	11.6	11.4	11.4	11.2	11.0	10.8	10.8	11.4	10.2	9.8	9.5	
22.0					10.7	10.4	10.3	10.2	10.0	9.8	9.8	9.6	9.4	9.2	9.2	10.6	8.8	8.5	8.2	
24.0					10.5/22.2	9.2	9.1	8.9	8.7	8.5	8.5	8.3	8.1	7.9	7.9	9.0	7.6	7.3	7.0	
26.0						8.7/25.0	8.1	7.9	7.7	7.5	7.4	7.2	7.0	6.8	6.9	6.7	6.5	6.3	6.1	
28.0							7.4/27.6	7.0	6.8	6.6	6.5	6.3	6.1	5.9	5.9	5.8	5.6	5.4	5.2	
30.0								6.3	6.1	5.8	5.8	5.6	5.4	5.2	5.2	5.0	4.8	4.6	4.4	
32.0								6.2/30.4	5.5	5.2	5.1	4.9	4.7	4.5	4.5	4.3	4.1	3.9	3.7	
34.0									5.2/33.1	4.7	4.6	4.3	4.1	3.9	3.9	3.7	3.5	3.3	3.2	
36.0										4.3/35.8	4.1	3.9	3.6	3.4	3.4	3.2	3.0	2.8	2.6	
38.0											3.7	3.4	3.2	3.0	3.0	2.8	2.6	2.4	2.2	
40.0											3.6/38.5	3.1	2.8	2.6	2.5	2.3	2.2	1.9	1.8	
42.0												2.9/41.2	2.5	2.2	2.2	2.0	1.8	1.6	1.4	
44.0													2.2/43.9	1.9	1.9	1.7	1.5	1.3	1.1	
46.0														1.7	1.6	1.4	1.2	1.0		
48.0														1.6/46.6	1.3	1.1				
50.0															1.2/49.3					
52.0																				
54.0																				
Cable ø	Number of falls																			
28 mm	8	8	8	8	7	7	6	5	5	5	4	4	4	3	3	3	3	2	2	
34 mm	5	5	5	5	5	5	4	4	4	3	3	3	3	3	2	2	2	2	2	


Table no. 6100R-80/2175/28.0+17.0/11.18SH

6100E Load capacity



Boom radius [m]	Boom length [m]																	
	10.3	13.1	15.9	18.7	21.5	24.3	27.1	29.9	32.7	35.5	38.3	41.1	43.9	46.7	49.5	52.3	55.1	
3.0	100.0	100.0/3.2	100.0/3.5	100.0/3.8														
4.0	94.4	98.1	98.9	92.6	86.5	75.9/4.3	67.6/4.6	60.7/4.8										
5.0	82.6	78.1	74.0	70.3	66.8	63.6	60.9	58.2	55.0/5.1	50.1/5.4	46.0/5.7	42.4/5.9						
6.0	61.7	61.6	58.9	56.3	54.0	51.8	49.9	47.9	46.2	44.5	42.9	41.3	39.2/6.2	36.4/6.5	33.9/6.7			
7.0	48.3	48.3	48.3	46.8	45.1	43.4	42.0	40.5	39.3	37.9	36.7	35.4	34.4	33.3	32.2	31.1	28.7/7.3	
8.0	39.5	39.5	39.5	39.3	38.6	37.2	36.2	35.0	34.0	32.9	31.9	30.8	30.0	29.1	28.2	27.3	26.5	
9.0	33.3	33.3	33.2	33.1	33.0	32.5	31.7	30.6	29.8	28.9	28.1	27.2	26.5	25.7	25.0	24.2	23.5	
10.0	28.6	28.7	28.6	28.5	28.3	28.1	28.0	27.2	26.5	25.7	25.0	24.2	23.7	22.9	22.3	21.6	21.0	
11.0	25.0	25.1	25.0	24.9	24.7	24.5	24.6	24.3	23.8	23.0	22.4	21.7	21.3	20.6	20.0	19.4	18.8	
12.0	23.7/11.4	22.2	22.2	22.0	21.9	21.7	21.7	21.5	21.5	20.8	20.2	19.6	19.2	18.7	18.7	17.6	17.0	
13.0		19.9	19.8	19.7	19.5	19.3	19.4	19.2	19.1	18.9	18.4	17.8	17.5	17.0	16.5	16.0	15.5	
14.0		17.9	17.9	17.7	17.6	17.4	17.4	17.2	17.2	17.0	16.8	16.3	16.0	15.5	15.0	14.6	14.1	
15.0		17.7/14.1	16.3	16.1	16.0	15.8	15.8	15.6	15.5	15.3	15.2	14.9	14.7	14.2	13.8	13.3	12.9	
16.0			14.9	14.7	14.6	14.4	14.4	14.2	14.1	13.9	13.8	13.6	13.5	13.1	12.7	12.2	11.8	
17.0			13.9/16.8	13.5	13.4	13.2	13.2	13.0	12.9	12.7	12.6	12.4	12.4	12.1	11.7	11.3	10.9	
18.0				12.5	12.3	12.1	12.1	11.9	11.8	11.7	11.5	11.3	11.3	11.1	10.8	10.4	10.0	
19.0				11.6	11.4	11.2	11.2	11.0	10.9	10.7	10.6	10.4	10.4	10.2	10.0	9.6	9.2	
20.0				11.1/19.5	10.6	10.4	10.4	10.1	10.1	9.9	9.7	9.5	9.5	9.4	9.2	8.9	8.5	
22.0					9.2	9.0	9.0	8.8	8.7	8.5	8.3	8.1	8.1	7.9	7.8	7.6	7.3	
24.0					9.1/22.2	7.9	7.8	7.6	7.5	7.3	7.2	7.0	7.0	6.8	6.6	6.4	6.2	
26.0						7.4/25.0	6.9	6.7	6.6	6.4	6.2	6.0	6.0	5.8	5.6	5.5	5.3	
28.0							6.3/27.6	5.9	5.8	5.6	5.4	5.2	5.2	5.0	4.8	4.6	4.5	
30.0								5.3	5.1	4.9	4.7	4.5	4.5	4.3	4.1	3.9	3.8	
32.0								5.2/30.4	4.5	4.3	4.2	3.9	3.9	3.7	3.5	3.3	3.1	
34.0									4.3/33.1	3.8	3.7	3.4	3.4	3.2	3.0	2.8	2.6	
36.0										3.4/35.8	3.2	3.0	2.9	2.7	2.6	2.4	2.2	
38.0											2.9	2.6	2.5	2.3	2.1	1.9	1.8	
40.0											2.8/38.5	2.3	2.2	1.9	1.8	1.6	1.4	
42.0												2.1/41.2	1.8	1.6	1.5	1.3	1.1	
44.0													1.6/43.9	1.4	1.2	1.0		
46.0														1.1	0.9			
48.0														1.0/46.6				
50.0																		
52.0																		
54.0																		
Cable ø	Number of falls																	
28 mm	8	8	8	8	7	6	5	5	4	4	4	4	3	3	3	3	3	
34 mm	5	5	5	5	5	4	4	4	3	3	3	3	2	2	2	2	2	

6100E Diaphragm wall grab equipment

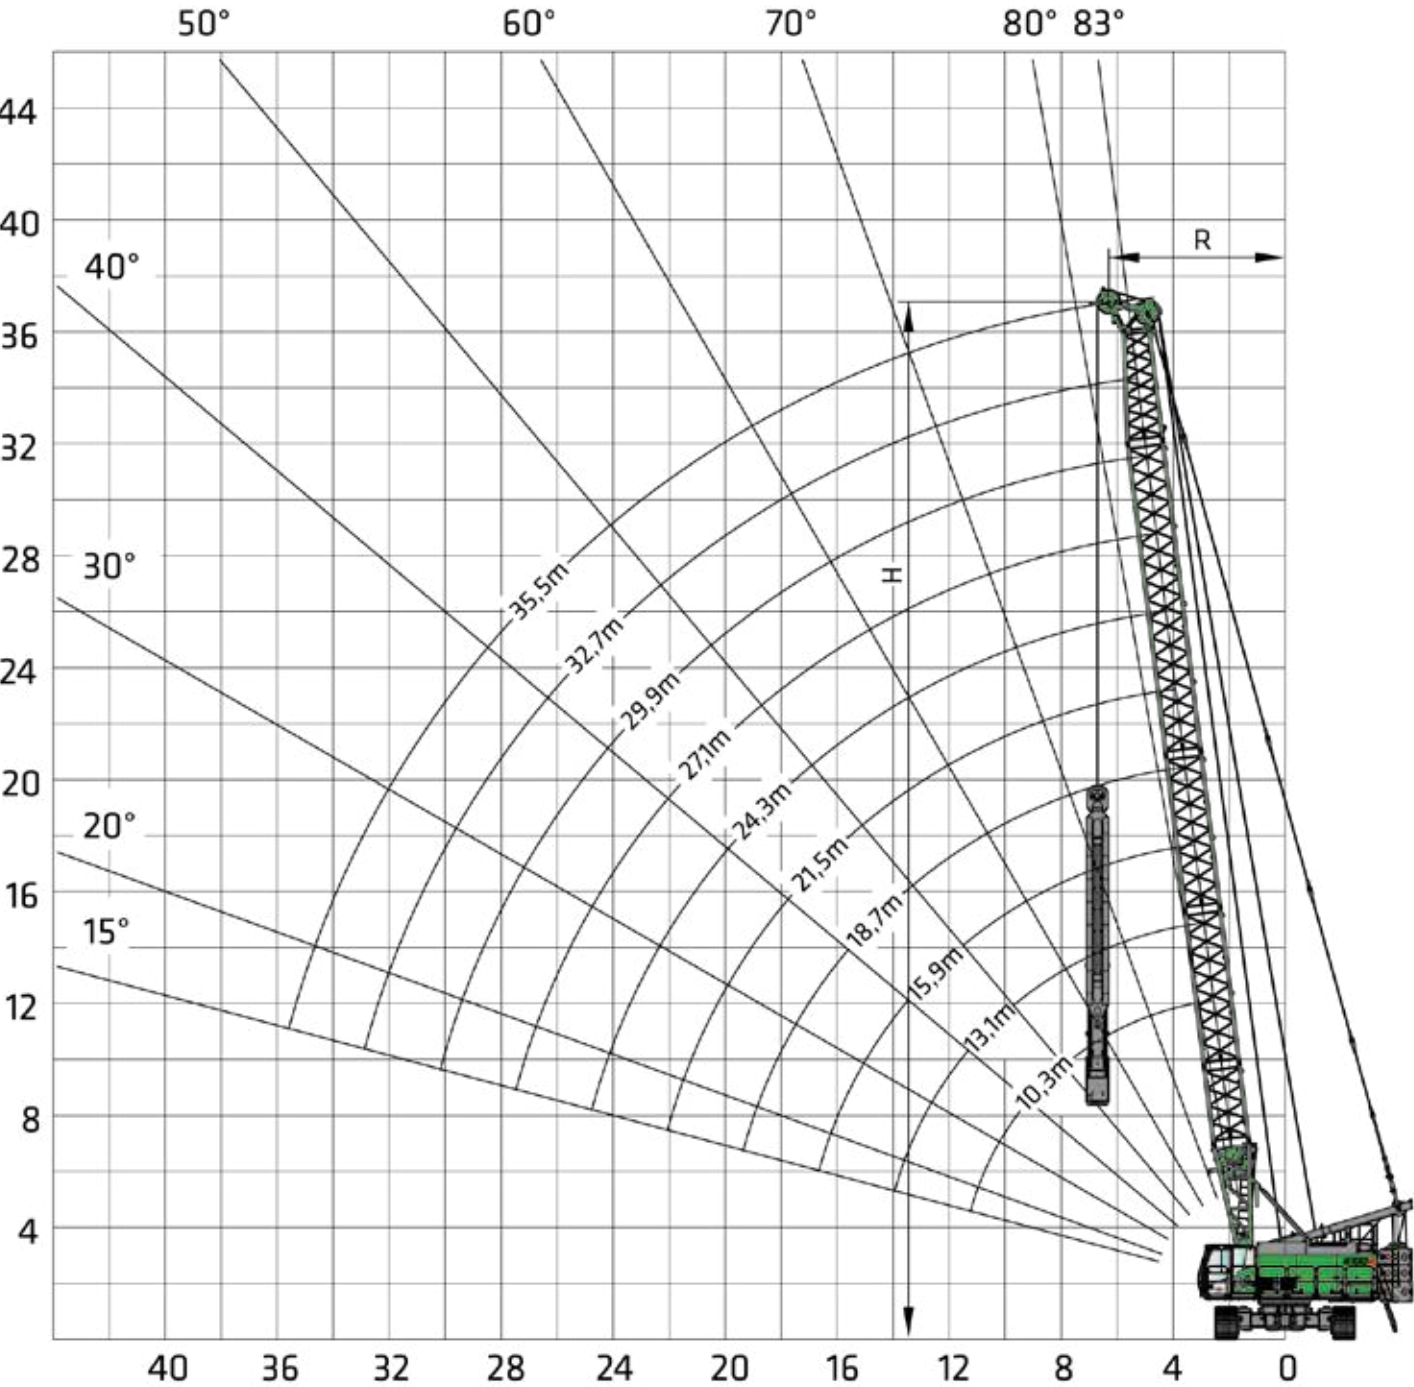

6100E Load capacity



Diaphragm wall grab





Boom radius [m]	Boom length [m]									
	10.3	13.1	15.9	18.7	21.5	24.3	27.1	29.9	32.7	35.5
3.2	45.5/3.2	45.5/3.6	45.5/3.9							
4.0	45.5	45.5	45.5	45.5/4.3	45.5/4.6	45.5/4.9				
5.0	45.5	45.5	45.5	45.5	45.5	45.5	45.5/5.3	45.5/5.6		
6.0	45.5	45.5	45.5	45.5	45.5	45.5	45.3	43.3	41.4	38.2/6.3
7.0	37.3	37.4	37.4	37.3	37.3	37.2	37.2	37.1	37.5	34.2
8.0	30.6	30.6	30.6	30.5	30.5	30.4	30.3	30.2	30.1	30.0
9.0	25.7	25.8	25.8	25.7	25.6	25.5	25.5	25.4	25.3	25.2
10.0	22.2	22.2	22.2	22.1	22.1	21.9	21.9	21.8	21.7	21.6
11.0	19.4	19.4	19.4	19.4	19.3	19.2	19.1	19.0	18.9	18.8
12.0	18.3/11.4	17.2	17.2	17.1	17.1	17.0	16.9	16.8	16.7	16.5
13.0		15.4	15.4	15.3	15.3	15.1	15.1	15.0	14.9	14.7
14.0		13.9	13.9	13.8	13.8	13.6	13.6	13.5	13.4	13.2
15.0		13.7/14.1	12.7	12.6	12.5	12.4	12.3	12.2	12.1	12.0
16.0			11.6	11.5	11.4	11.3	11.3	11.1	11.0	10.9
17.0			10.7/16.8	10.6	10.5	10.4	10.3	10.2	10.1	9.9
18.0				9.7	9.7	9.5	9.5	9.4	9.2	9.1
19.0				9.0	8.9	8.8	8.8	8.6	8.5	8.4
20.0				8.6/19.5	8.3	8.2	8.1	8.0	7.9	7.7
22.0					7.2	7.1	7.0	6.9	6.8	6.6
24.0					7.1/22.2	6.2	6.2	6.0	5.9	5.7
26.0						5.8/25.0	5.4	5.3	5.2	5.0
28.0							4.9/27.6	4.7	4.5	4.4
30.0								4.1	4.0	3.9
32.0								4.0/30.4	3.5	3.4
34.0									3.3/33.1	3.0
36.0										2.7/35.8
38.0										
40.0										

- Notes:
1. The load ratings given apply when the machine is on a firm and level surface.
 2. The load ratings are given in tonnes and apply 360 degrees.
 3. The load capacities do not exceed 60 % of the tipping load.
 4. The weight of the load handling equipment (hooks, suspension gear) should be deducted from the load capacities.
 5. Lifting a load that exceeds the maximum tensile force of the winch is only permitted if each individual winch is not overloaded.

Winch tensile force [kN]	200	275	300
Cable diameter [mm]	28	34	34
Minimum breaking force [kN]	710	976	1065
max. load capacity in single-winch operation [t]	20.0	27.5	30.0
max. load capacity in double-winch operation [t]	30.3	41.7	45.5



6100E Dragline bucket equipment

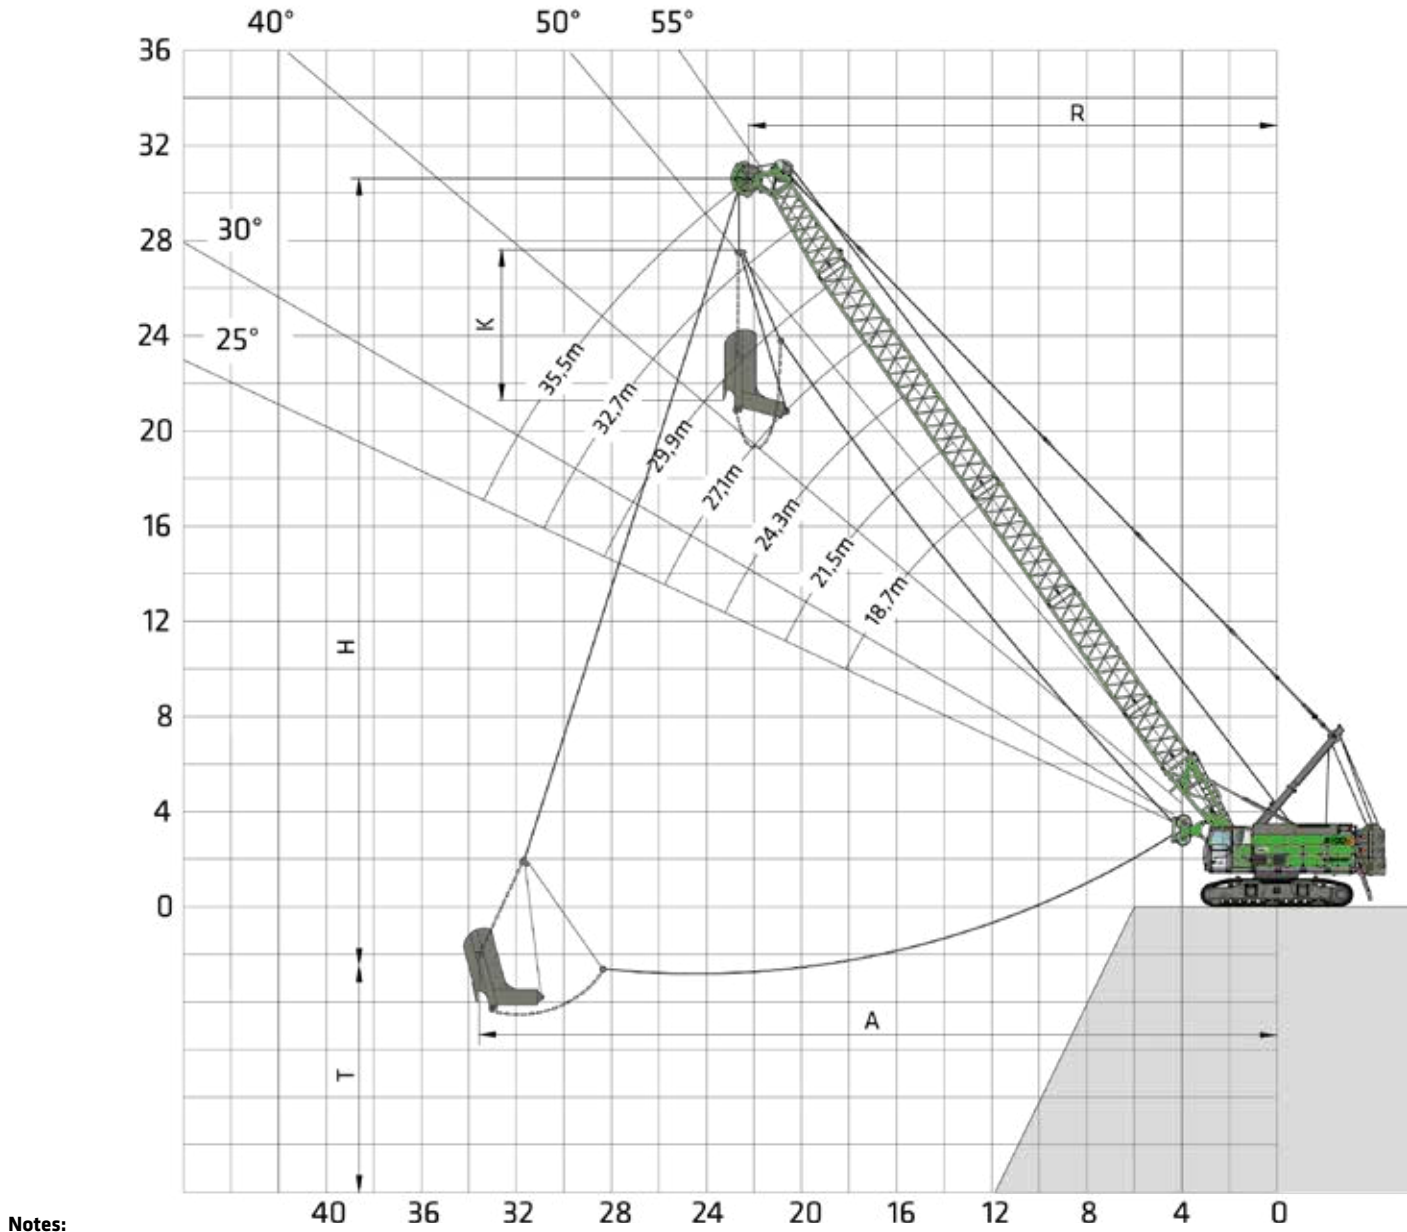

- Notes:
- 1. The load ratings given apply when the machine is on a firm and level surface.
 - 2. The load ratings are given in tonnes and apply 360 degrees.
 - 3. The load ratings apply for the stabilizer/undercarriage track width of 4200 mm.
 - 4. The load capacities include the dragline bucket weight and do not exceed 75 % of the tipping load.
 - 5. The load capacity is limited by the maximum cable pull and/or by the maximum tensile force of one winch.
- | | | | |
|---|------|------|------|
| Winch tensile force [kN] | 200 | 275 | 300 |
| Cable diameter [mm] | 28 | 34 | 34 |
| Minimum breaking force [kN] | 710 | 976 | 1065 |
| max. load capacity when operating dragline bucket [t] | 20.0 | 27.5 | 30.0 |

28.0 t	Boom length [m]																	
	18.7						21.5						24.3					
	27.1						29.9						32.7					
	35.5																	
Boom angle alpha [°]	18.7			21.5			24.3			27.1			29.9			32.7		
	R	H	t	R	H	t	R	H	t	R	H	t	R	H	t	R	H	t
55	12.6	16.9	20.0	14.2	19.2	16.8	15.8	21.5	14.3	17.4	23.8	12.4	19.0	26.1	10.7	20.6	28.4	9.3
50	13.8	15.9	17.6	15.6	18.0	14.8	17.4	20.2	12.5	19.2	22.3	10.8	21.0	24.5	9.3	22.8	26.6	8.0
45	15.0	14.7	15.7	17.0	16.7	13.1	19.0	18.7	11.0	20.9	20.7	9.5	22.9	22.6	8.1	24.9	24.6	6.9
40	16.1	13.5	14.2	18.2	15.3	11.8	20.4	17.1	9.9	22.5	18.9	8.5	24.6	20.7	7.2	26.8	22.5	6.1
35	17.0	12.2	13.1	19.3	13.8	10.9	21.6	15.4	9.0	23.9	17.0	7.7	26.2	18.6	6.5	28.5	20.2	5.5
30	17.8	10.7	12.3	20.3	12.1	10.1	22.7	13.5	8.4	25.1	14.9	7.1	27.5	16.3	5.9	30.0	17.7	5.0
25	18.5	9.3	11.7	21.1	10.5	9.6	23.6	11.6	7.9	26.1	12.8	6.7	28.7	14.0	5.6	31.2	15.2	4.7

6100E Grab equipment

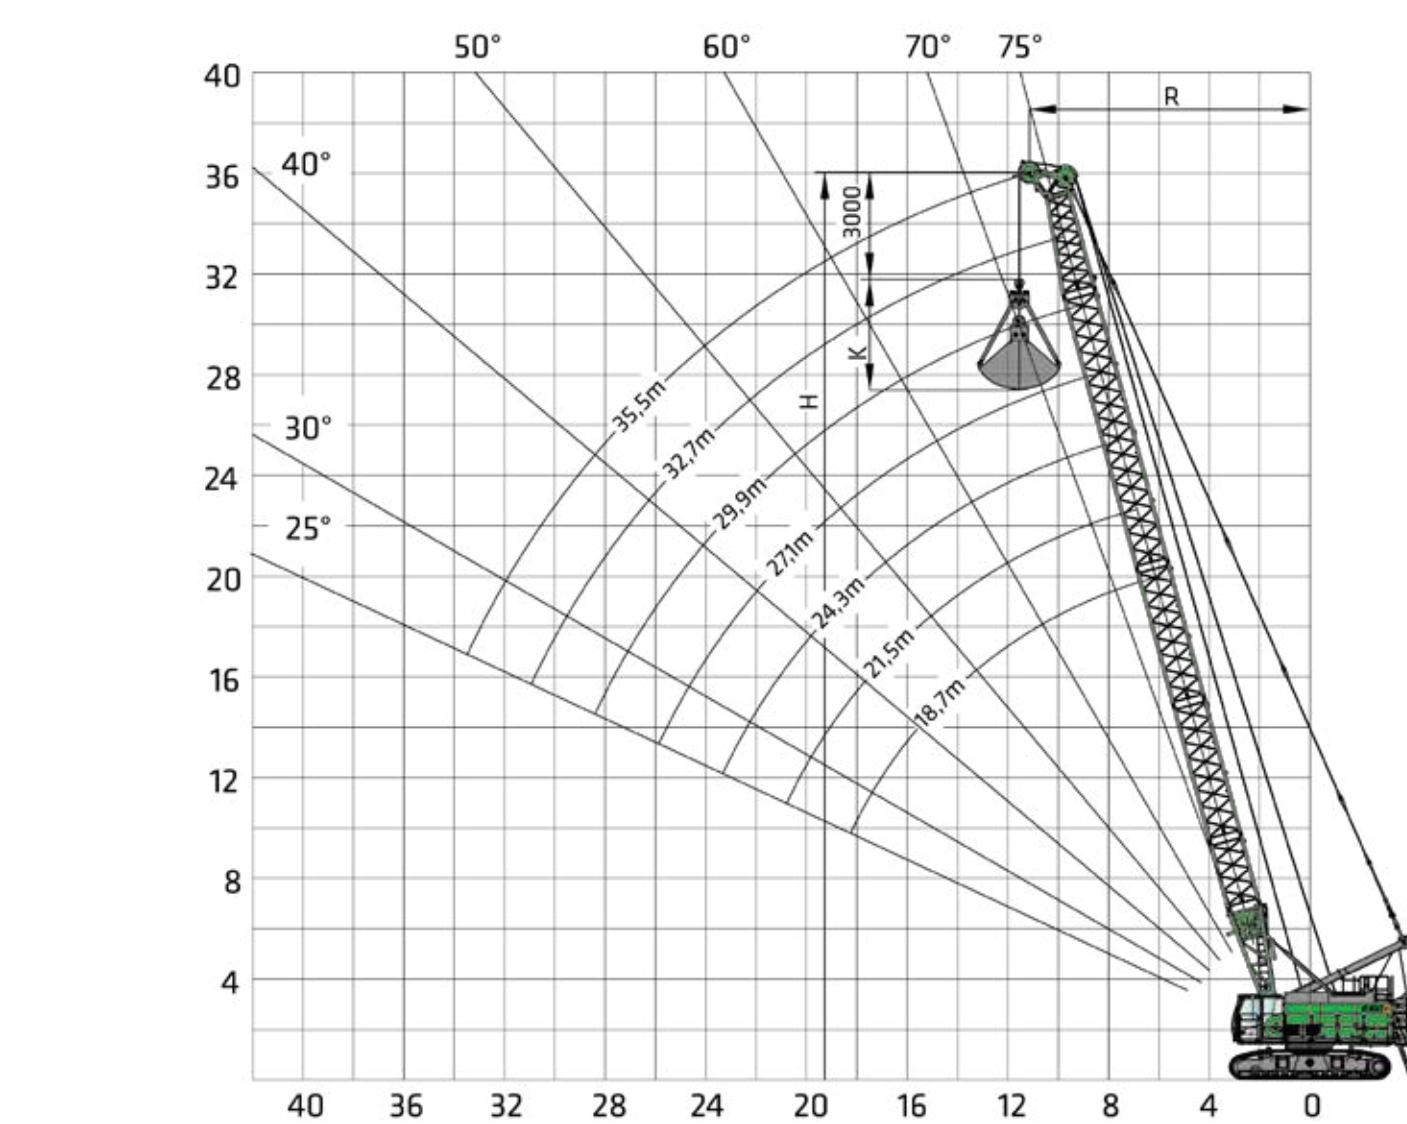

- Notes:
- 1. The load ratings given apply when the machine is on a firm and level surface.
 - 2. The load ratings are given in tonnes and apply 360 degrees.
 - 3. The load ratings apply for the stabilizer/undercarriage track width of 4200 mm.
 - 4. The load capacities include the grab weight and do not exceed 66.7 % of the tipping load.
 - 5. For operation with a mechanical two-rope grab and even load distribution on the closing and holding ropes, the load capacity is limited by the permissible cable pull or the maximum tensile force of a winch.
- | | | | |
|--|------|------|------|
| Winch tensile force [kN] | 200 | 275 | 300 |
| Cable diameter [mm] | 28 | 34 | 34 |
| Minimum breaking force [kN] | 710 | 976 | 1065 |
| max. load capacity in single-winch operation [t] | 20.0 | 27.5 | 30.0 |
| max. load capacity in double-winch operation [t] | 30.3 | 41.7 | 45.5 |

28.0 t	Boom length [m]																	
	18.7						21.5						24.3					
	27.1						29.9						32.7					
	35.5																	
Boom angle alpha [°]	18.7			21.5			24.3			27.1			29.9			32.7		
	R	H	t	R	H	t	R	H	t	R	H	t	R	H	t	R	H	t
75	6.8	19.9	43.2	7.5	22.6	37.0	8.2	25.3	32.1	9.0	28.0	28.4	9.7	30.7	25.2	10.4	33.4	22.6
70	8.3	19.3	31.8	9.3	22.0	27.1	10.3	24.6	23.4	11.2	27.2	20.6	12.2	29.8	18.2	13.1	32.5	16.2
65	9.8	18.6	25.1	11.0	21.2	21.3	12.2	23.7	18.4	13.4	26.3	16.1	14.6	28.8	14.1	15.7	31.3	12.5
60	11.2	17.8	20.8	12.6	20.3	17.6	14.0	22.7	15.0	15.4	25.1	13.1	16.8	27.5	11.4	18.2	30.0	10.0
55	12.6	16.9	17.8	14.2	19.2	14.9	15.8	21.5	12.7	17.4	23.8	11.0	19.0	26.1	9.6	20.6	28.4	8.3
50	13.8	15.9	15.6	15.6	18.0	13.0	17.4	20.2	11.0	19.2	22.3	9.5	21.0	24.5	8.2	22.8	26.6	7.1
45	15.0	14.7	13.9	17.0	16.7	11.6	19.0	18.7	9.8	20.9	20.7	8.4	22.9	22.6	7.2	24.9	24.6	6.1
40	16.1	13.5	12.7	18.2	15.3	10.5	20.4	17.1	8.8	22.5	18.9	7.5	24.6	20.7	6.4	26.8	22.5	5.4
35	17.0	12.2	11.7	19.3	13.8	9.7	21.6	15.4	8.1	23.9	17.0	6.9	26.2	18.6	5.8	28.5	20.2	4.9
30	17.8	10.7	10.9	20.3	12.1	9.0	22.7	13.5	7.5	25.1	14.9	6.3	27.5	16.3	5.3	30.0	17.7	4.4
25	18.5	9.3	10.3	21.1	10.5	8.5	23.6	11.6	7.0	26.1	12.8	5.9	28.7	14.0	5.0	31.2	15.2	4.1

6100E Dynamic soil compaction



28 t 0.0 t Boom radius [m]	Boom length [m]						
	18.7	21.5	24.3	27.1	29.9	32.7	35.5
6.0							
7.0	25.0	25.0					
8.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
9.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
10.0	22.7	22.6	22.4	22.4	22.2	22.1	22.0
11.0		19.8	19.6	19.5	19.4	19.3	19.1
12.0			17.4	17.3	17.2	17.0	16.9
13.0				15.5	15.3	15.2	15.0
14.0							
15.0							

- Notes:
1. The load ratings given apply when the machine is on a firm and level surface.
 2. The load ratings are given in tonnes and apply 360 degrees.
 3. The load capacities do not exceed 75 % of the tipping load.
 4. The load ratings apply for the undercarriage track width of 4200 mm.
 5. Lifting heights should not exceed 25 m.
 6. The load ratings apply for 2 winch operation.



Loading hook




For 300 kN/275 kN winch with 34 mm cable diameter

Capacity	Weight	Cable strands and max. load capacity [kg]							
		8	7	6	5	4	3	2	1
20 t	550 kg								20,000
60 t 1-roll	950 kg						60,000	40,000	20,000
100 t 2-roll	1100 kg				100,000	80,000	60,000	40,000	20,000


For 200 kN winch with 28 mm cable diameter

Capacity	Weight	Cable strands and max. load capacity [kg]							
		8	7	6	5	4	3	2	1
15 t	350 kg								14,000
40 t 1-roll	800 kg						40,000	28,000	14,000
70 t 2-roll	900 kg				70,000	56,000	42,000	28,000	14,000
100 t 3-roll	900 kg		98,000	84,000	70,000	56,000	42,000	28,000	14,000


6100E Basic machine dimensions

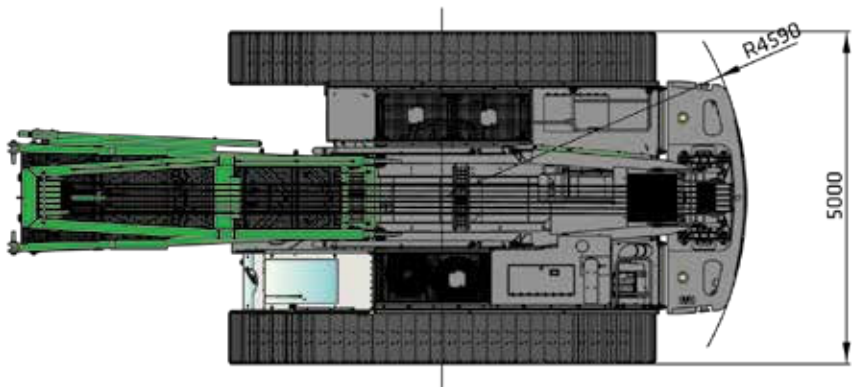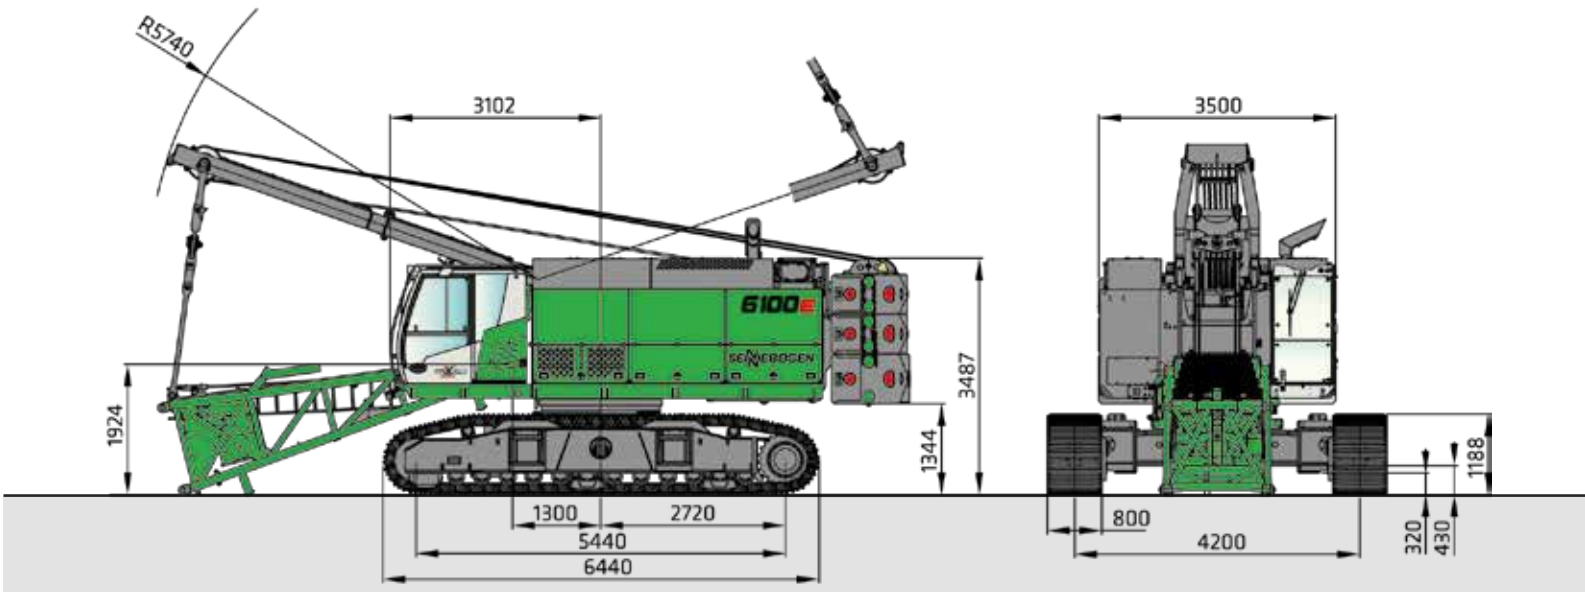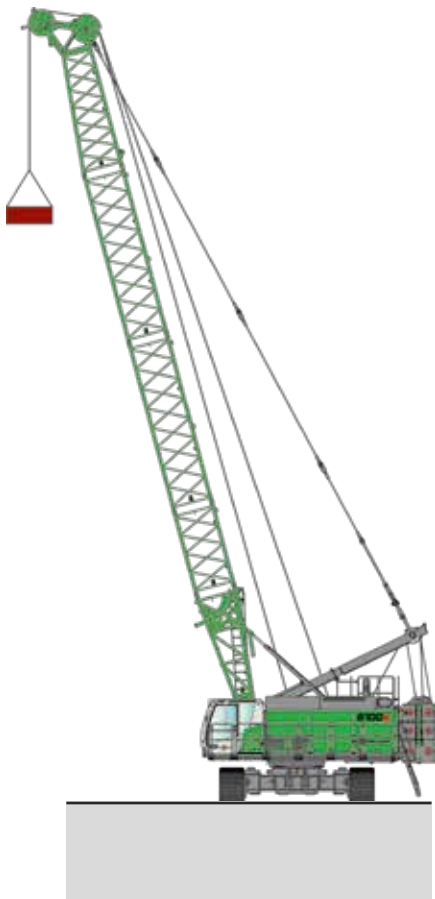

6100E Transport dimensions and weights


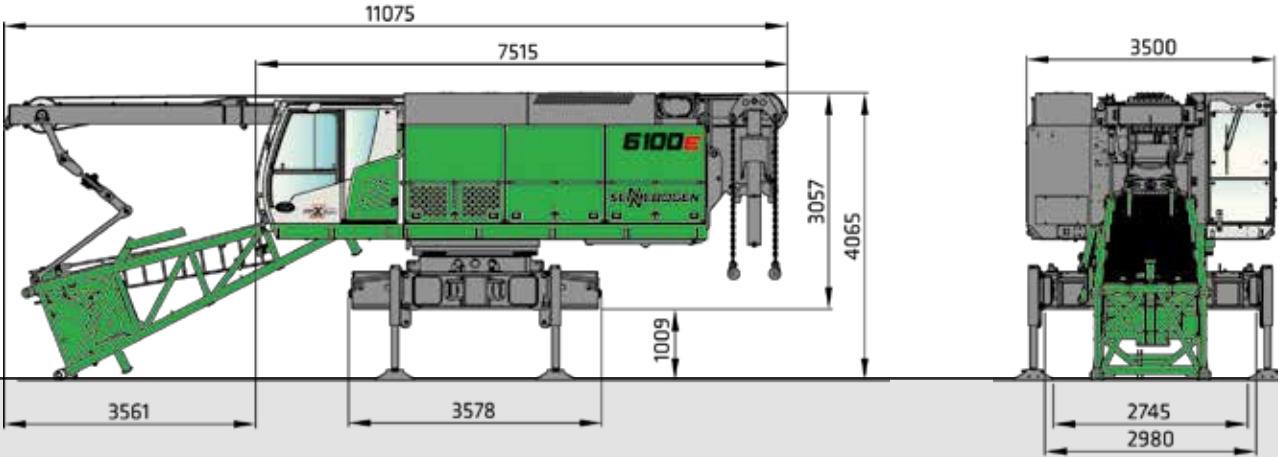


Basic machine with hoisting device and dismounted traveling gear **Weight:** approx. 40900 kg


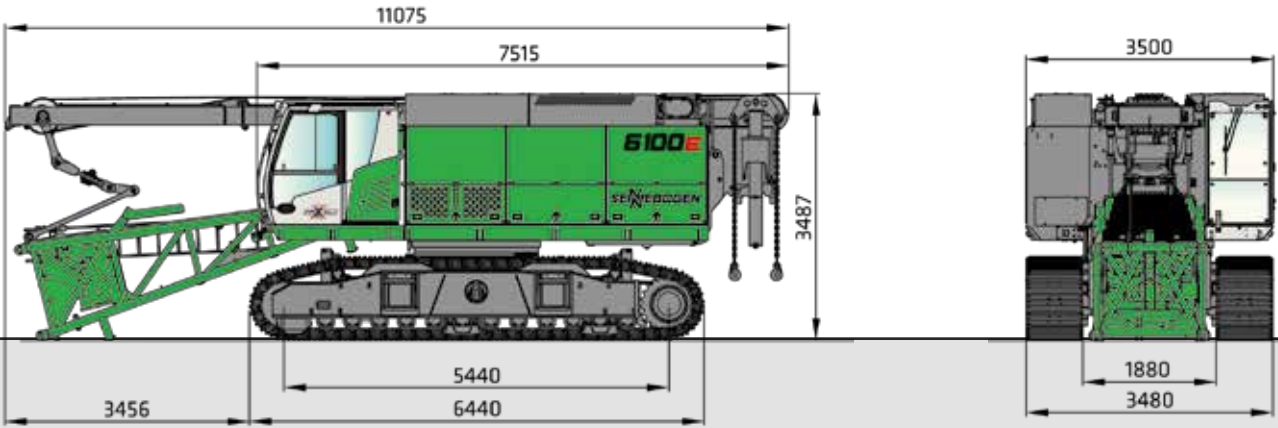


Basic machine transport dimensions with tracks attached **Weight:** approx. 59700 kg

6100E Transport dimensions and weights



Boom section 2.8 m, SH type 1608-2 (with tensioning cables)
Weight: 530 kg



Boom section 5.6 m, SH type 1608-2 (with tensioning cables)
Weight: 890 kg





Boom section 11.2 m, SH type 1608-2 (with tensioning cables)
Weight: 1610 kg




Boom head piece 5.15 m, type 1608-2 (with tensioning cables)
Weight: 2000 kg




S 24.3 auxiliary boom
Weight: 705 kg





Crawler tracks 2 piece (800 mm triple grouser shoes) **Weight:**10000 kg (2x)



Ballast base plate
Weight: 14000 kg








Counter weight 6 piece / 4 piece (counter weight 35 t/ 28 t)
Weight: 3500 kg (6 x / 4 x)




Undercarriage ballast 2 piece
Weight: 8500 kg (2 x)

6100E Self-assembly system

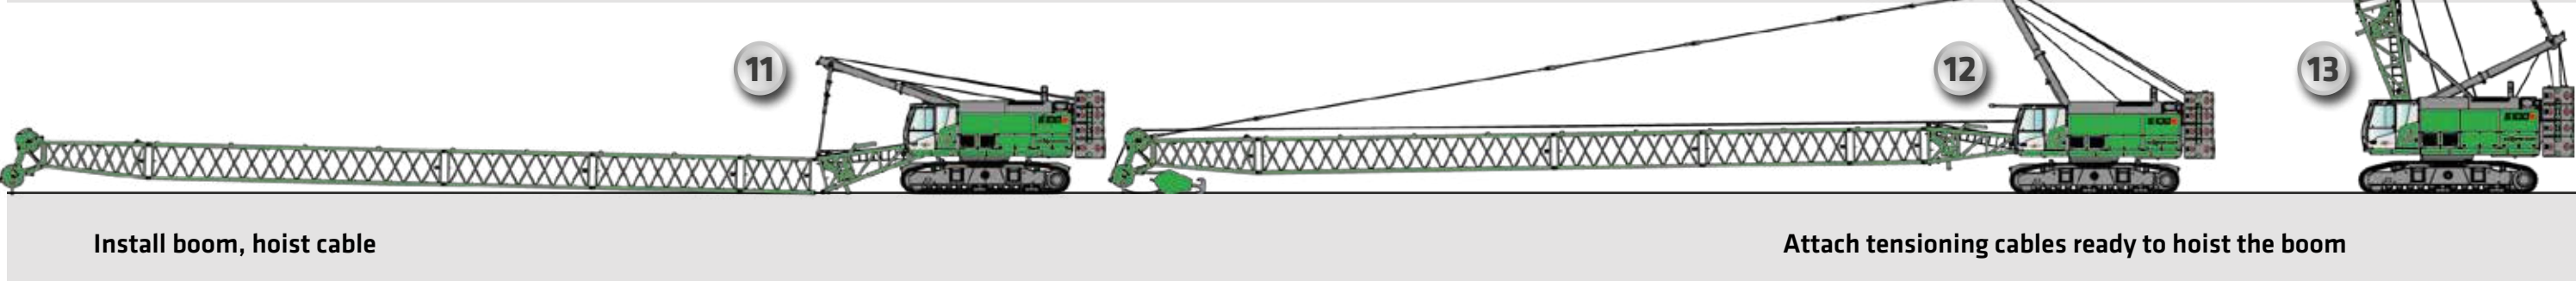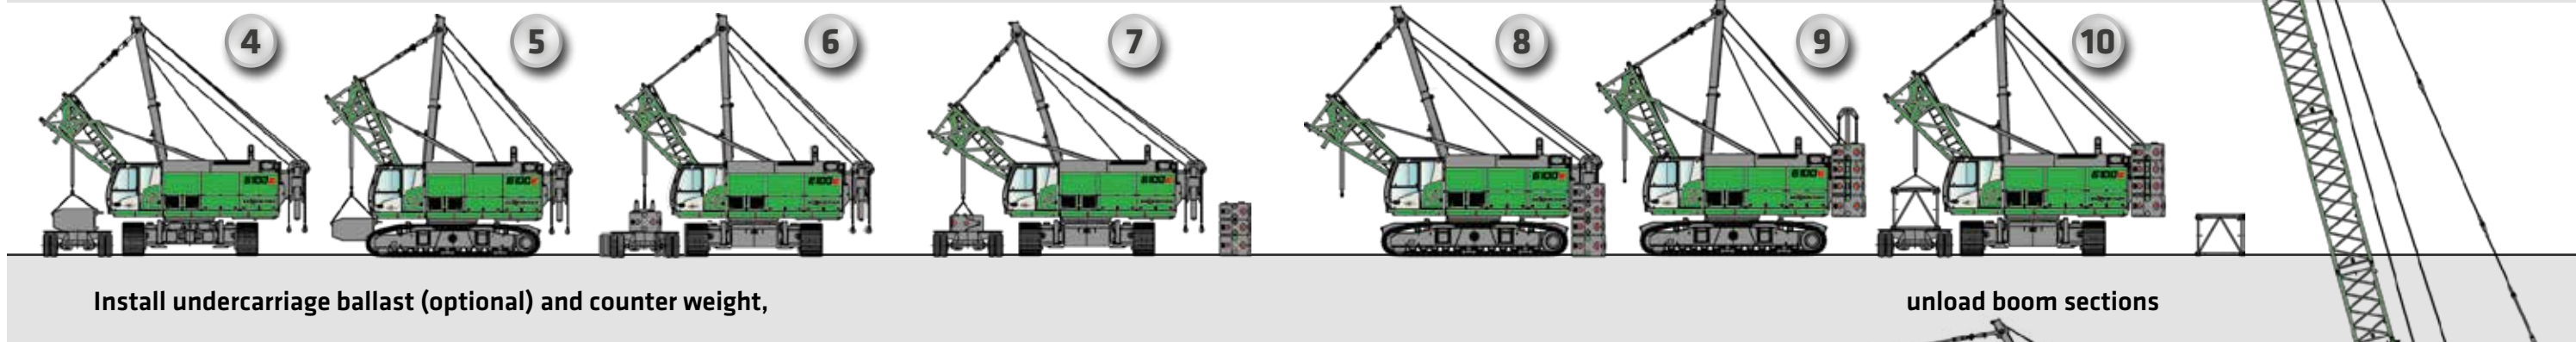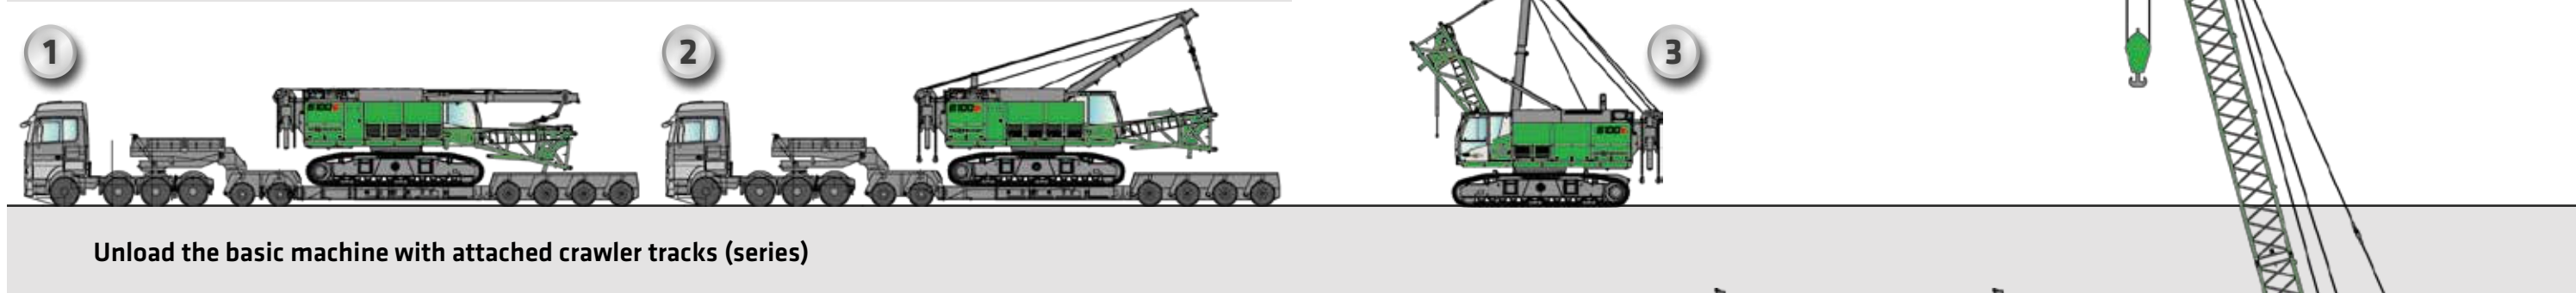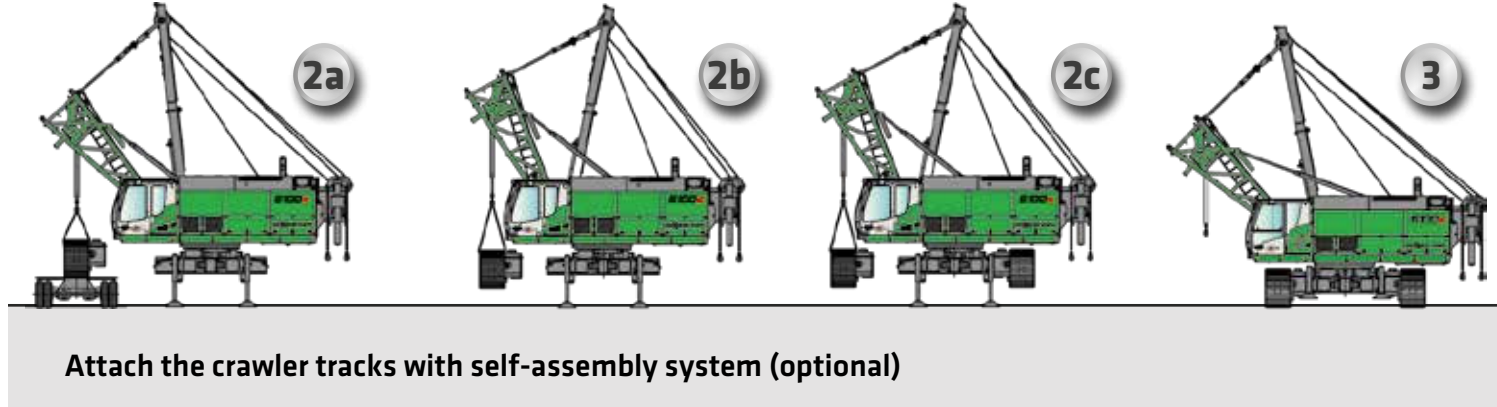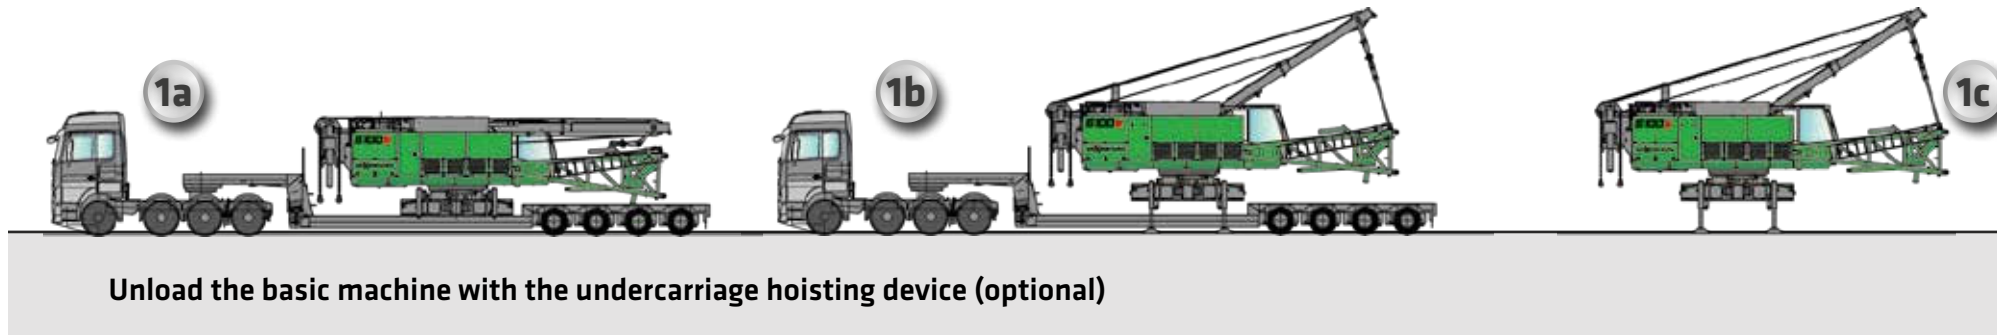

6100E

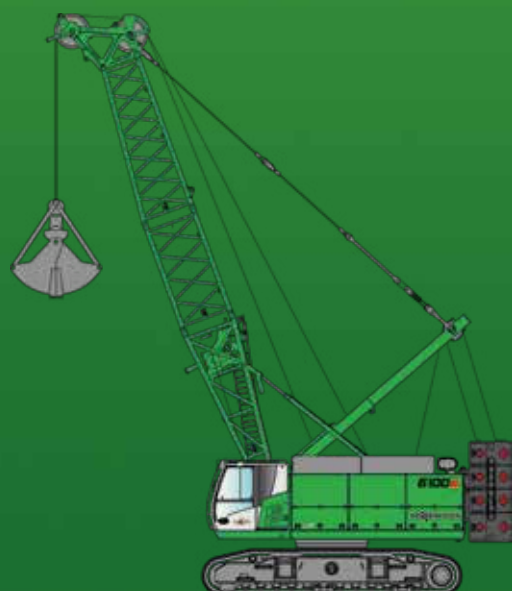

This catalog describes machine models, scopes of equipment of individual models, and configuration options (standard equipment and optional equipment) of the machines delivered by SENNEBOGEN Maschinenfabrik. Machine illustrations can contain optional equipment and supplemental equipment. Actual equipment may vary in a tolerance range depending on the country to which the machines are delivered, especially in regard to standard and optional equipment

All product designations used may be trademarks of SENNEBOGEN Maschinenfabrik GmbH or other supplying companies, and any use by third parties for their own purposes may violate the rights of the owners.

Please contact your local SENNEBOGEN sales partner for information concerning the equipment variants offered. Requested performance characteristics are only binding if they are expressly stipulated upon conclusion of the contract. Delivery options and technical features are subject to change. Errors and omissions excepted. Equipment is subject to change, and rights of advancement are reserved.

© SENNEBOGEN Maschinenfabrik GmbH, Straubing/Germany. Reproduction in whole or in part only with written consent of SENNEBOGEN Maschinenfabrik GmbH, Straubing, Germany.

SENNEBOGEN

SENNEBOGEN
Maschinenfabrik GmbH
Sennebogenstraße 10
94315 Straubing, Germany

Tel. +49 9421 540-144/146
marketing@sennebogen.de

Order no. 299267
6100R-E-031910-0720d-0922025

GO FOR GREEN

 www.sennebogen.com