


ALU BESCHOEIING


Serie 250

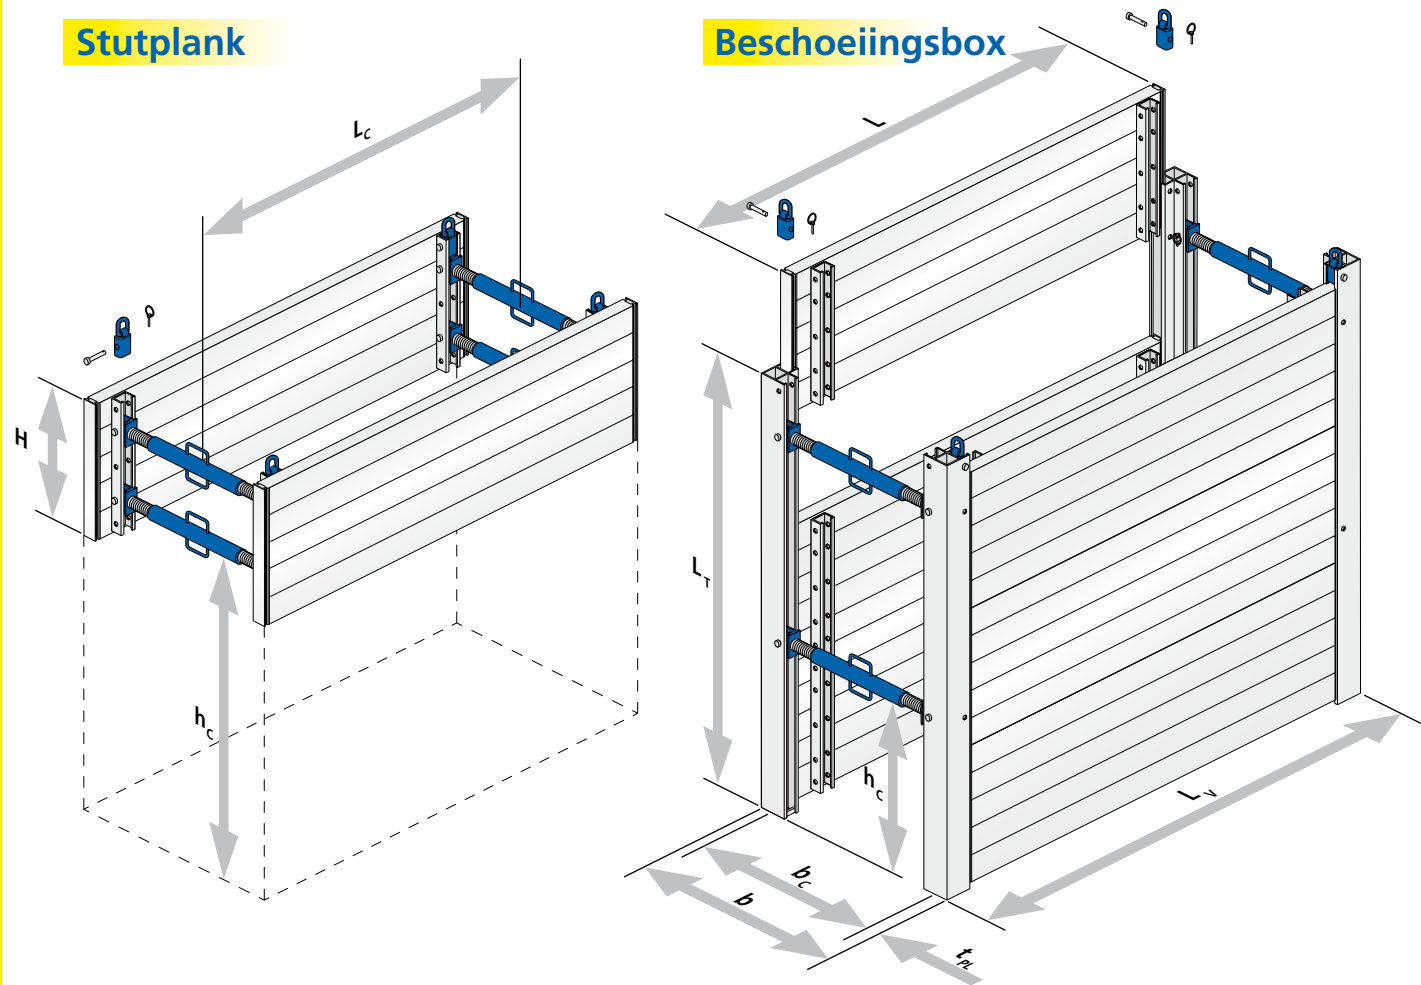

Alu platen $t_{PL} = 60\text{mm}$


plaatlengte L [m]	beschoeide lengte L _v [m]	beschoeide hoogte H [m]	vrije lengte L _c [m]	vrije hoogte h _c [m]	toelaatbare gronddruk [kN/m²]	gewicht met stempels type B [kg/box]	gewicht gesloten put [kg/put]
1,50	1,50	0,60	1,18	1,32	32,6	95	130
	1,72	1,20	1,58	0,71		185	250
		1,80 2,40				250 370 485	
2,00	2,00	0,60	1,68	1,32	26,5	110	160
	2,22	1,20	2,08	0,71		215	305
		1,80 2,40				295 380 600	
2,50	2,50	0,60	2,18	1,32	21,6	120	185
	2,72	1,20	2,58	0,71		240	360
		1,80 2,40				340 435 710	
3,00	3,00	0,60	2,68	1,32	17,5	135	215
	3,22	1,20	3,08	0,71		270	420
		1,80 2,40				380 490 825	

Gesloten put

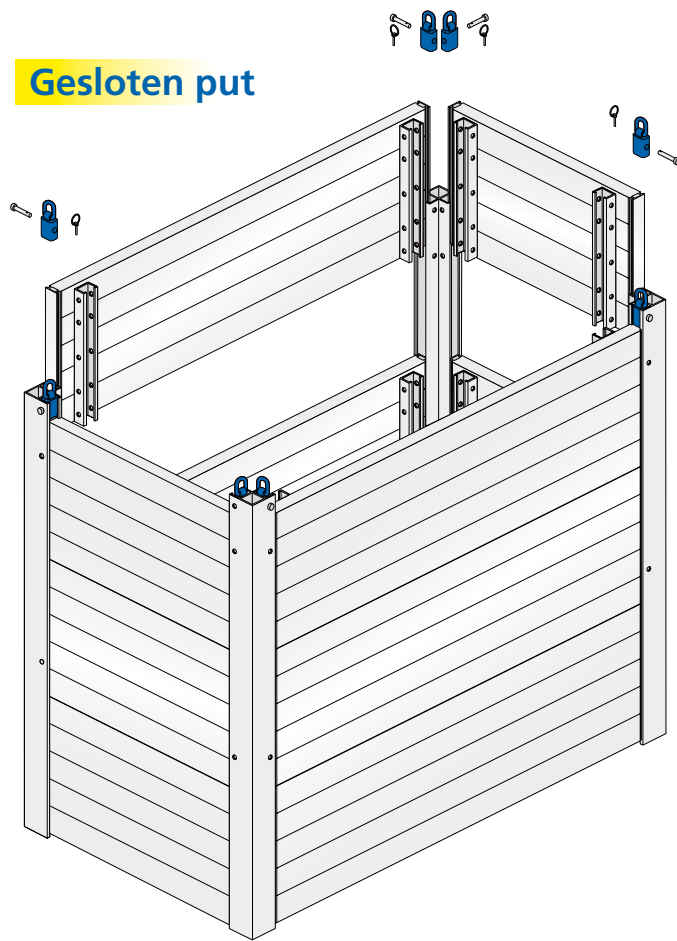

Alu glijbalken

lengte glijbalk L_T [m]	gewicht [kg]
0,70	5,4
1,30	10,0
1,90	14,6
2,50	19,2

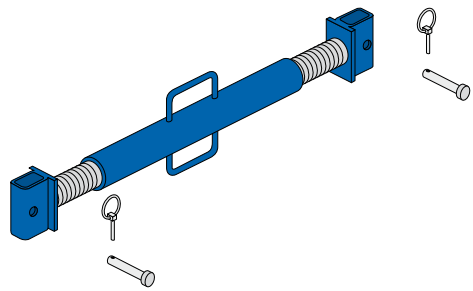

Alu stempels

stempel type	werkbreedte b_c [m]		sleufbreedte b [m]		toelaatbare drukkracht [kN]	gewicht [kg]
	min.	max.	min.	max.		
A	0,63	0,85	0,78	1,00	109	7,3
B	0,85	1,31	1,00	1,46	92	9,4
C	1,32	2,23	1,47	2,38	62	13,6

